Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

DC 3110KL Brushless Fan

FEATURES/ BENEFITS

- Size: 3.15 in sq. X .98 in (80.0mm sq. X 25.0 mm)
- Airflow: 25-46 CFM
- Weight: 3.3oz (95g)
- Noise: 22-40 dBA
- Lead Wire:
  AWG 24, Red/Black, UL1007, CSA TR-64
  AWG 26, Red/Black/ White, for 3 lead wires
- Impeller and Venturi:
  UL94V-0 Reinforced polybutylene plastic

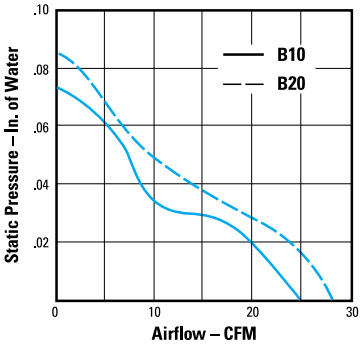



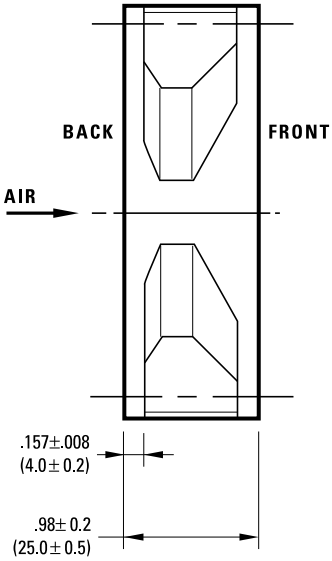

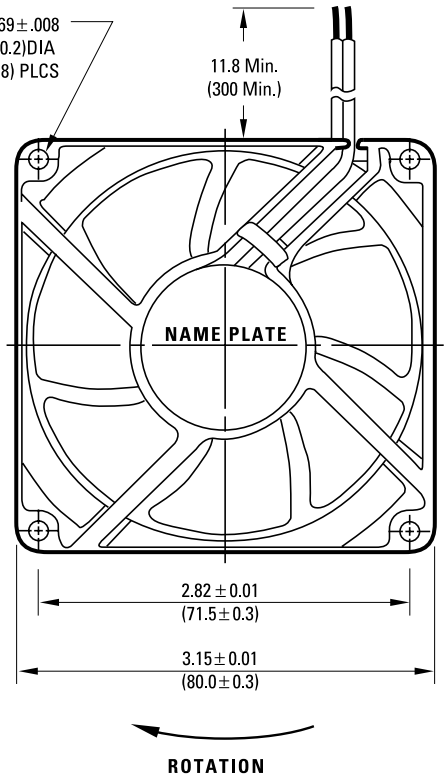

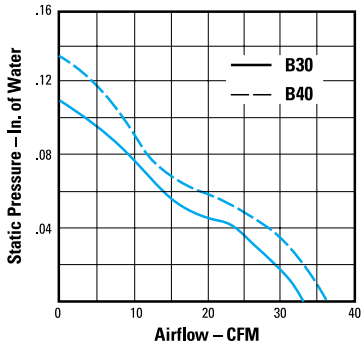

RIB TYPE (LOO)



FLANGE TYPE (POO)



Dimensions are in inches ( ) are in millimeters

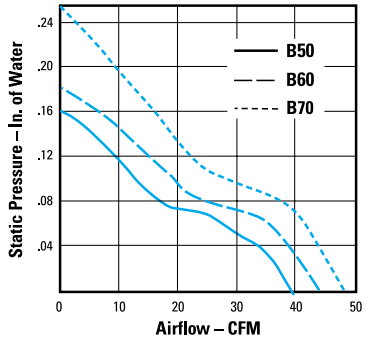

MODEL NUMBER	VOLTAGE (V)	POWER (W)	CURRENT (A)	SPEED (RPM)	NOISE (dBA)	PRESSURE (in H20)	AIRFLOW (CFM)
3110KL-04W-B10-P00	12	1.20	100	2150	22	0.06	25
B20-P00	12	1.32	110	2400	25	0.08	28
B30-P00	12	2.04	170	2700	28	0.10	32
B40-P00	12	2.40	200	3000	31	0.13	35
B50-P00	12	2.76	230	3250	34	0.15	39
B60-PA0	12	3.12	260	3600	36.5	0.18	44
B70-P00	12	3.36	290	4000	40	0.26	46
3110KL-05W-B10-P00	24	1.44	60	2150	22	0.06	25
B20-P00	24	1.68	70	2400	25	0.08	28
B30-P00	24	1.92	80	2700	28	0.10	32
B40-P00	24	2.40	100	3000	31	0.13	35
B50-P00	24	2.88	120	3250	34	0.15	39
B60-PA0	24	3.36	140	3400	35	0.16	40

NMB Technologies Corporation • 9730 Independence Ave., Chatsworth, CA 91311 • Tel: 818.341.3355 • Fax: 818.341.8207 • Internet: www.nmbtech.com • e-mail: thermal@nmbtech.com